

SiI9292 MHL™-to-HDMI Bridge

MHL-to-HDMI bridge device for HD audio and video connectivity

The SiI9292 enables the design of low-power, MHL-to-HDMI accessories such as docking stations, converters and adapters, enabling HD audio and video connectivity between mobile devices enabled with MHL and HDTVs and displays with HDMI inputs.

Applications

- MHL docking stations
- MHL cable accessories

Key Features

- MHL input
- HDMI output
- Low BOM cost

Benefits Summary

- Low-power consumption
- Small package

Industry-Standard Compliance

- HDMI 1.3a
- MHL

Digital Audio/Video Output

- Integrated TMDS core
- HDMI output
- HDMI output resolution support from 25 MHz - 75MHz, up to 1080p@ 24/30 Hz

Digital Audio/Video Input

- Integrated TMDS core
- MHL input
- MHL input resolution support from 25 MHz - 75MHz, up to 1080p@ 24/30 Hz

Single-Wire Control Bus

Consumer Electronics Control (CEC) & DDC

Support for DDC and CEC signals

System Operation

- Optional software control for smart cable/ dongle applications via 1 MHz local I²C bus
- Flexible interrupt registers and an interrupt pin

Power Management


- 1.2 V and 3.3 V rails for low-power operation
- Flexible power-down modes

Available Packages

- 40-pin QFN
- 6 mm x 6 mm footprint

Operating Range

 -20°C to +85°C extended temperature range support

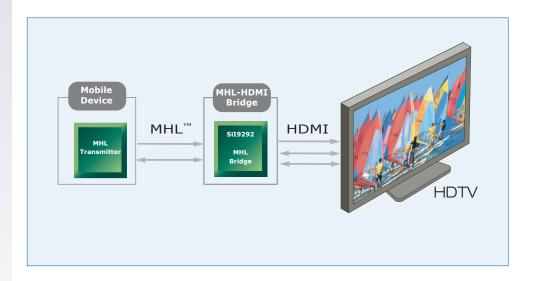

Enhancing the connected HD experience

1060 E. Arques Ave., Sunnyvale, CA 94085 T 408.616.4000 F 408.830.9530 www.siliconimage.com